

Fox trap assembly Instructions



Boxed unit



Rear frame



Front frame



Fixings pack



Trigger rod

Parts

Front frame

Rear frame

Fixings pack, (nuts / bolts / clips /spanner)

Trigger rod

frame assembly clamps

Step 1

Front frame assembly

Remove the white cable ties and unfold the cage into a square



Fold the Anti fold support frame under the bottom of the cage. This will stop the trap from folding.



Step 2

Rear frame assembly

Cut the cable ties and unfold the cage. Whilst unfolding, remove the trigger rod located in image 2

The rear door will fold down and there will be 1 x support bar to secure into the clips located on the side

Image 2



Remove trigger rod



Anti fold support clips here



Use the 4 x trigger clips to secure the rear door closed.



Step 3

Attach the 2 x frames together using the 8 x clamp nuts and bolts. We do not recommend attaching them on grass incase you lose the nuts.

Place the clamps on the second square from the top and bottom.



Do not tighten with the spanner until all clamp bolts have been fitted hand tight, then tighten with the spanner

1




Hover the rod with the U shaped hook above the tread plate

2



Hook from underneath the plate and twist the rod so the U hook connects to the tread plate

3

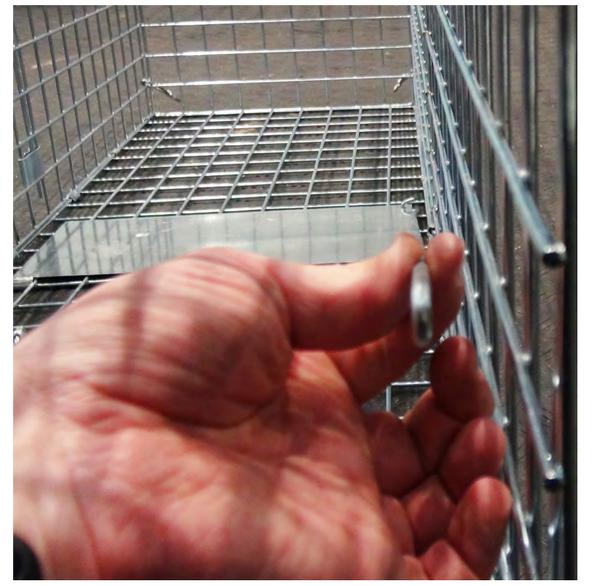

The rod position should look like the image above

4



Raise the trap door to the roof of the cage.

5



Connect the double sided spring hooks like the above image

6



Your trap is in the armed / ready to trap position. You can test the trap by pushing the treadplate manually.