

GDK 44" fox trap Instruction manual

Scan here for
video instructions



www.gdktrading.co.uk

01582 879 588

sales@gdktrading.co.uk

STEP 1



Your Fox trap will arrive already flat packed (folded) which will be tied together by metal wire / cable ties. Simply un-tie the metal wire / cut the cable ties to release the trap. The trap can then be erected into a rectangular prism.


STEP 2




Whilst unfolding the trap ensure the metal plate in the middle of the trap is on the floor. This is the plate which will trigger the trap door.

Clip the rear door into the metal clips on either side of the trap. *TIP* we recommend using 1x cable tie to secure the rear door when you are ready to trap a fox, this avoids the fox from pulling the door inwards with its teeth.

STEP 3

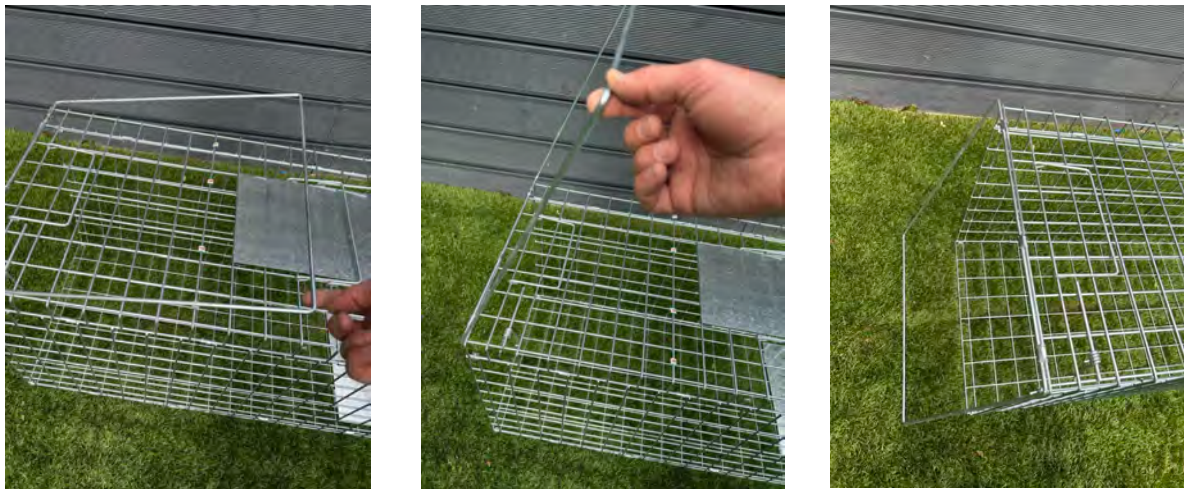


At the front of the trap there is a support bar which will stop the cage from folding. Fold the bar and tuck it underneath the base of the trap

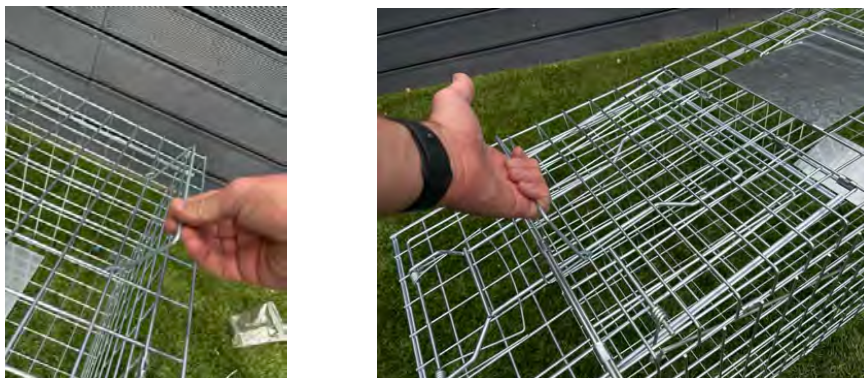

There are 3 carry handles along the top of the trap, one on each end and one in the centre.


STEP 4

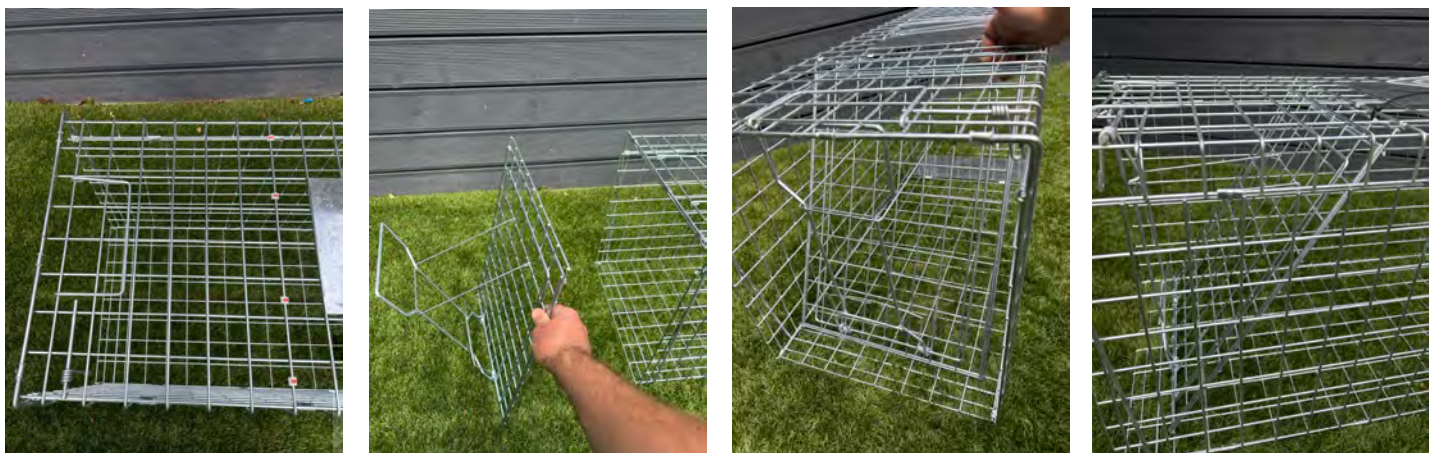

Attach the door on the 8th metal runner, normally indicated with red arrow stickers. The trap door should end so it is inside the cage as shown in the image to the far right. Use the ring clips provided to clamp the door to the roof of the trap. You can use a cable tie to hold the door whilst you attach the metal clips. Once fastened, the door will automatically be set in the trapped position.



STEP 5

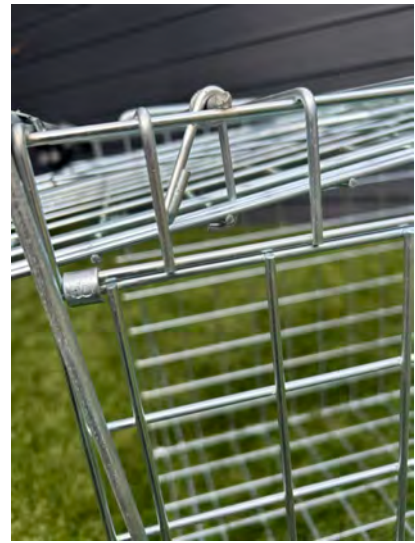


To arm the trap door, push down the anti fold bar and lift the door up to the roof of the cage. Attach the L shape hook to the door. The U shape hook is for the trigger rod

Step 6



Attaching the trigger rod.

With the tread plate flat on the floor, there will be a pre-drilled hole on the top right hand corner. hover the trigger rod above the tread plate with the rounded hook facing up, keeping the hook in this position go through the pre-drilled hole on the tread plate from underneath, once you go through the hole, turn the rod to the right (pictured above) so the other end of the rod is vertical (pictured blow). The U hook is now ready to connect to the double sided spring to trigger the door release.

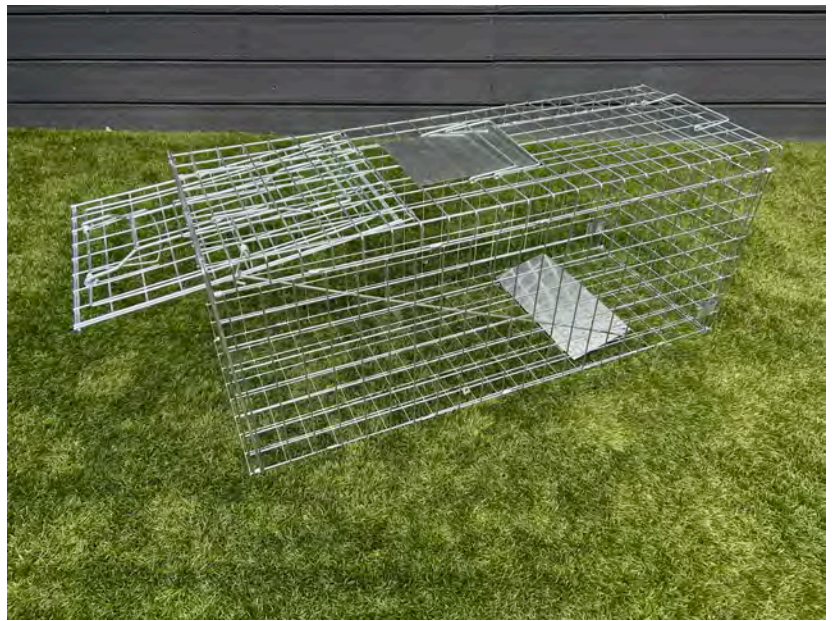

Assembly is Complete and the trap is ready to use.

Folding trap design

Once you have performed the above assembly, you do not need to take the door off to have the trap in a folded position. Below are the steps you take to fold the trap away for storage

Step 1 - remove the trigger rod from the trap completely.

Step 2 - untuck the support bar from under the frame of the trap (located on the trap door side)

Step 3 - Bring the trap door and the rear door to the roof of the cage, the trap will then automatically fold in half flat.

Step 4 - Lift the trap from the centre join (watch your fingers) the trap will then fold in half again.

Secure the frame and the trigger rod together so you do not loose them.



GDK 44" fox trap Instruction manual

Scan here for
video instructions



www.gdktrading.co.uk

01582 879 588

sales@gdktrading.co.uk